
Mutina

Celosia ^{by} Patricia Urquiola



ΕN


General information Laying and maintenance tips Technical features Packing

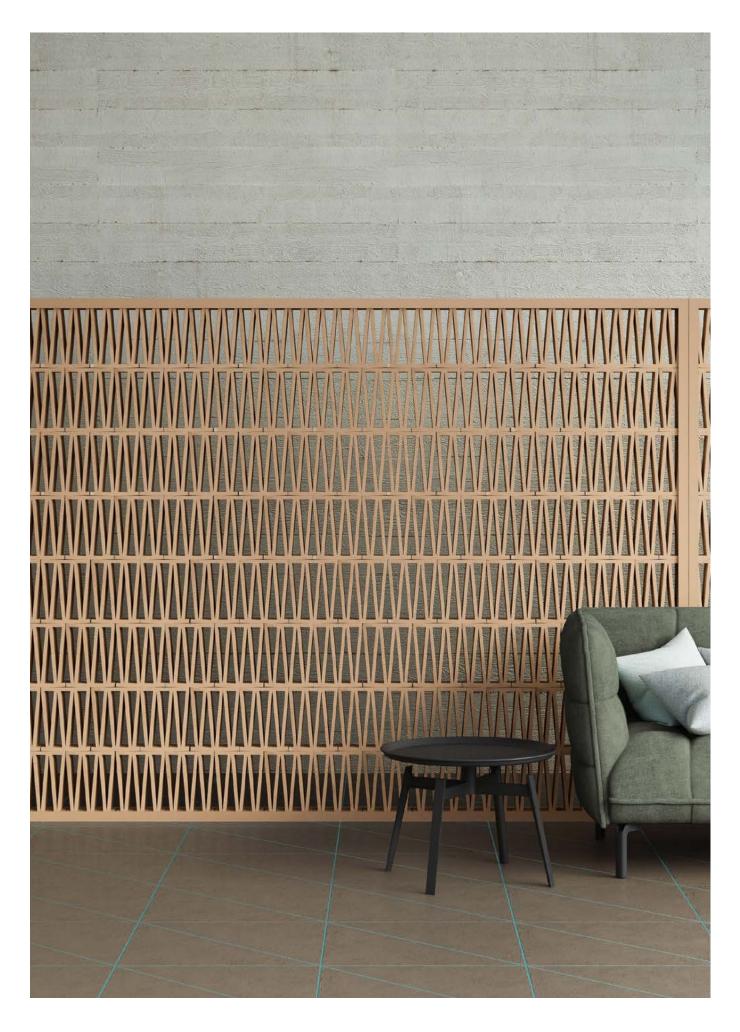

General information

The data, information and indications contained in this technical data sheet and in further documents relating to the Celosia by Patricia Urquiola product are the exclusive property by Ceramiche MUTINA S.p.a. This Technical Data Sheet provides the buyer with information relating to the use of the product useful for its correct installation and evaluation and prevention of risks arising from the normal use of the same.

collection	Celosia				
design	Patricia Urquiola, 2018				
production	Artisanal				
material	Extruded terracotta				
nominal sizes	20,5·26,5·10 cm (8"·10"· 4")				
specification	 Artisanal extruded partition elements, 10cm thick. This product is suitable for both residential and commercial spaces to construct walls with a maximum height of 4 metres. The buyer is not released from the obligation of checking the information received, and for making design and construction choices in compliance with good construction techniques and regulations, including local ones, in force at the time of use of the product and in the country of final destination. The NTC 2018 DECRETO MIN 27/01 regulation shall apply in Italy. In order to achieve an optimal aesthetic outcome we advise to install Celosia using our wooden profile. The profile is painted and suitable for outdoor use. A top profile with removable sides is provided for ceiling fixing. As complementary pieces Mutina provide the Mutina adhesive, EC 1 plus for VOC emissions. For installation process see the installation video available on www.mutina.it The product is suitable for indoor and outdoor areas complying with UNI EN 772-22 marked "F1-moderate exposure". 				
complementary pieces	Linear profile 300, top profile 300.				
awards	Interior Design's Best of Year 2018 German Design Awards 2020				
category	UNI 11128/2004				




20,5·26,5·10 cm 8"·10"·4"

complementary pieces


Linear painted willow profile (also suitable for outdoor use).


Top painted willow profile (also suitable for outdoor use) with one shaped end to make clamping easier.



To make the installation of these items easier, a Mutina adhesive is now available: organic, eco-friendly and sold separately.

wall anchoring scheme






For security reasons only staggered installation is strictly allowed.

Standard installation suggestions have been tested by Mutina and certified by the Giordano Institute. | DOWNLOAD THE DOCUMENT




Fisher long shaft fixing SXR 8x80






ANCHORING ON 3 SIDES Max h 400x300 cm



ANCHORING ON 2 SIDES MAX h250x100 cm



Laying and maintenance tips

use	Wall – indoor Wall – outdoor in moderate exposure areas only				
installation	For security reasons only staggered installation is strictly allowed. For installation process see the installation video available on www.mutina.it				
reccommended adhesive	Mutina adhesive: solvents-free, eco-friendly organic adhesive				
reccommended joints	-				
reccommended fillers	-				
cleaning at the end of installation	Avoid drippings during installation. If needed the excess can be removed after the product has dried, using a tool with a sharp edge.				
general cleaning installed tiles)	-				
calibers (real size)	$20.5 \times 26.5 \times 10$ cm with 1-3 mm tolerance (artisanal product)				

Colors



Technical features

STANDARD	FEATURES	VALUE REQUIRED	CELOSIA		
UNI EN 772-16	dimensions	to declare	T2 – R2		
UNI EN 772-21:2011	water absorption	to declare	12.5%		
UNI EN 772-5:2016	content of active soluble salts	content of active soluble salts to declare S2			
UNI EN CEN/TS 772- 22:2006	N/TS 772- 22:2006 freeze-thaw resistance to declare		F1		
D.M. 1401/2008	determination of horizontal variable loads	to declare	C2		
LEED CERTIFICATION 4.1			10% recycled material		
VOC EMISSION			available upon request		
DECLARATION OF CONTENTS			available upon request		
SDS			available upon request		
BPD3			available upon request		
HDP			available upon request		

Packing

SIZE	PCS-SQM	PCS-PAL	SQM-PAL	KG-PC	KG-PAL
20,5·26,5·10 cm	18,41	32	1,74	5,50	176,00

